



---

**TRUSTED, ACCURATE AND  
RELIABLE!**

---

**The most comprehensive IT certification  
preparation materials in the industry!**

All rights reserved. No part of this document may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law. Unauthorized copying, reselling, or distribution of this document is strictly prohibited and may result in legal action.

<https://www.virtulearner.com>  
[support@virtulearner.com](mailto:support@virtulearner.com)

**HP**


**HPE6-A69**

**Aruba Certified Switching**

**Expert Written Exam**

**QUESTION: 1**

Refer to the exhibit.

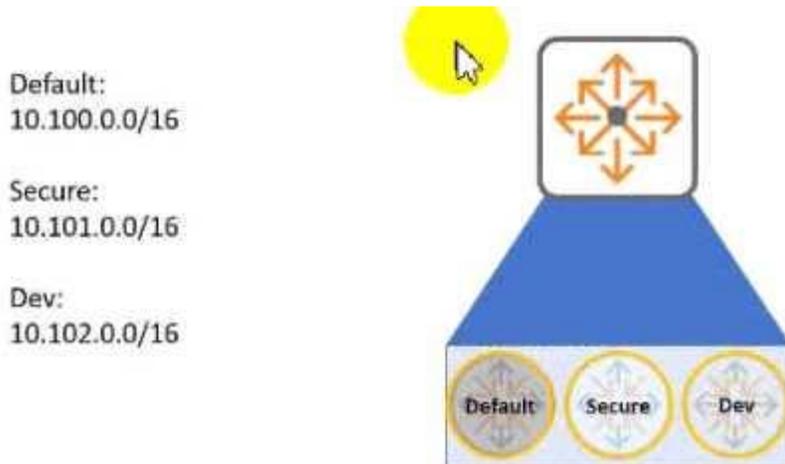

Aruba CX 6300 switch has routes in three different VRFs as per the example above. The user needs to leak routes between VRF Secure and VRF Dev. and also between VRF default and VRF Dev The customer is not able to establish routing between directly connected networks 10.100.50.0/24 and 10.102.26.0/24 Which statement is true regarding the routing troubleshooting?

- A. Multi-protocol BGP routing needs to be defined for route leaking
- B. Route Distinguisher needs to be set to 1 for default VRF.
- C. Route leaking is supported between non-default VRFs only
- D. Route leaking between default and non-default VRFs is supported with Aruba CX 8400.

**Answer(s):** A

**QUESTION: 2**

You have created an OSPF neighbor configuration with ArubaOS-CX 8320 VSX and a third-party switch The OSPF peering falls. In the event logs you see the following entries. 2020-10-28:03:14 20.371489|hpe-routing|LOG\_WARN|AMM|1/5|OSPFV2|OSPFV2iOSPF 268698624 Packet received with unexpected authentication type 2020-10-28:03:14.20.371503|hpe-routing|LOG\_WARN|AMM|1/5|OSPFV2|OSPFV2|Expected authentication type = 0 Which statement is true about the above events?

- A. The ArubaOS-CX switch requires plain-text authentication with OSPF.
- B. The third-party switch should be configured with MD5 authentication
- C. The ArubaOS-CX switch does not expect authentication with OSPF.
- D. The third-party switch should be configured with key chain authentication

**Answer(s):** D

**QUESTION: 3**

When applying the following access-list to an ArubaOS-CX 6300 switch:

```
10 permit tcp any RADIUS-SERVERS group WEB-PORTS log
20 permit udp any any group DHCP-PORTS log
30 permit udp any any group DNS-PORTS log
40 permit icmp any RADIUS-SERVERS log
50 deny tcp any MANAGEMENT-SERVERS log
60 deny icmp any MANAGEMENT-SERVERS count
70 permit udp any MANAGEMENT-SERVERS eq 162 count
80 permit udp any MANAGEMENT-SERVERS eq 69 log
```

How does this ACL behave on the selected switch? (Select two.)

- A. The mp traffic to MANAGEMENT-SERVERS group is logged to me event logs
- B. The tftp traffic to MANAGEMENT-SERVERS group is not logged to the event logs.
- C. The snmp-trap traffic to MANAGEMENT-SERVERS is logged to the event togs.
- D. The denied tcp traffic to the MANAGEMENT-SERVERS group is logged to event logs.
- E. The denied tcp traffic to the MANAGEMENT-SERVERS group is not logged to event logs

**Answer(s):** B, E

**QUESTION: 4**

The customer is considering Implemented the following VSX configuration that will host an Aruba mobility cluster servicing 9000 dual stack employee devices. The client's default gateways will be hosted on the VSX stack. The customer is seeking advice about how to ensure ArubaOS-CX VSX best practices have been applied.